

TEMPERATURE CONTROLLERS

VT SERIES LX CONTROLLER

- **Stainless Steel Cabinetry**
- **LX Microprocessor Instrument**
- **SPI Communications**
- **Modulating Cooling Valve**
- **Operating Temperatures to 250°F**
- **Heaters to 16KW and pumps to 3 HP**
- **Custom Cast Pump & Tank Assembly**

NEW DESIGN FOR BETTER TEMPERATURE CONTROL

TempTek's NEW Veteran LX temperature controller offers an enhanced microprocessor instrument and modulating cooling valve for more precise process temperature control... all packaged in new stainless steel cabinetry for a pleasing appearance.

All components, such as pumps, cylinders, contactors, valves and instruments are built for long term service and minimal maintenance. Veteran temperature controllers fit easily into any applications that require high level control of process temperature.

STRAIGHT-LINE TEMPERATURE CONTROL

The new modulating cooling valve precisely meters the right amount of cooling water to keep the process temperature within 1/2° of the setpoint. No pump seal or heater damage from the pressure spikes of water hammer.

FRIENDLY MICROPROCESSOR CONTROL

Large temperature display and digital selection of setpoint. Indicator lights for Power, Pump, Heat and Cool.

TWIN TANK SYSTEM

Separate tanks for heating and cooling gives greater temperature control and simplifies service and maintenance.

CUSTOM PUMP CASING

The custom pump casing produces more flow at less HP than conventional pumps for greater efficiency and energy savings.

AVAILABLE FROM STOCK

TempTek Veteran temperature controllers ship from stock or with short lead times, usually two week or less.

Quantity and **cash** discounts are offered. Call your dealer or the factory for discount plans.



VT 275-LX model shown.



New VT instrument



New modulating cooling valve

PRICE & PERFORMANCE... for the LONG TERM

525 East Stop 18 Road Greenwood, IN 46142 317-887-6352 fax: 317-881-1277 web site: www.TempTek.com email: sales@TempTek.com

TEMPTEK

since 1989

SPECIFICATIONS

VT SERIES SPECIFICATIONS

MODELS with 6KW Heaters		150	175	1100	1150	1200	1300
HEATER ¹	KW	6	6	6	6	6	6
PROCESS PUMP ²	HP	1/2	3/4	1	1-1/2	2	3
	GPM	20	35	45	62	75	80
	PSI	30	30	30	30	30	30
FULL LOAD AMPERAGE ³	230 / 3 / 60	17.0	17.8	18.6	20.2	21.8	24.6
DIMENSIONS (inches)	460 / 3 / 60	8.5	8.9	9.3	10.1	10.9	12.3
	Height	27	27	27	27	27	27
	Width	11	11	11	11	11	11
CONNECTIONS (inches)	Depth	16	16	16	16	16	16
	To / From Process	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
	Water Supply / Drain	1/2	1/2	1/2	1/2	1/2	1/2
WEIGHTS (lbs)	Shipping ⁴	195	200	205	205	210	220

MODELS with 10KW Heaters		250	275	2100	2150	2200	2300
HEATER ¹	KW	10	10	10	10	10	10
PROCESS PUMP ²	HP	1/2	3/4	1	1-1/2	2	3
	GPM	20	35	45	62	75	80
	PSI	30	30	30	30	30	30
FULL LOAD AMPERAGE ³	230 / 3 / 60	27.0	27.8	28.6	30.2	31.8	34.6
	460 / 3 / 60	13.5	13.9	14.3	15.1	15.9	17.3
DIMENSIONS (inches)	Height	27	27	27	27	27	27
	Width	11	11	11	11	11	11
	Depth	16	16	16	16	16	16
CONNECTIONS (inches)	To / From Process	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
	Water Supply / Drain	1/2	1/2	1/2	1/2	1/2	1/2
WEIGHTS (lbs)	Shipping ⁴	198	200	208	208	213	223

MODELS with 16KW Heaters		350	375	3100	3150	3200	3300
HEATER ¹	KW	16	16	16	16	16	16
PROCESS PUMP ²	HP	1/2	3/4	1	1-1/2	2	3
	GPM	20	35	45	62	75	80
	PSI	30	30	30	30	30	30
FULL LOAD AMPERAGE ³	230 / 3 / 60	42.0	42.8	43.6	45.2	46.8	49.6
	460 / 3 / 60	21.0	21.4	21.8	22.6	23.4	24.8
DIMENSIONS (inches)	Height	27	27	27	27	27	27
	Width	11	11	11	11	11	11
	Depth	16	16	16	16	16	16
CONNECTIONS (inches)	To / From Process	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
	Water Supply / Drain	1/2	1/2	1/2	1/2	1/2	1/2
WEIGHTS (lbs)	Shipping ⁴	200	205	210	210	220	225

Notes:

1. Derate heater by 25% for 208/3/60 operation.
2. Consult factory for pump curve performance.
3. Full load amps are higher than run load amps and must be used for sizing disconnects and supply wiring. Service disconnect by owner. Actual running amps at design conditions. Consult factory for 50Hz operation.
4. Unit weight crated for shipment.

STANDARD FEATURES and OPTIONS

UNIT CONSTRUCTION

- Stainless steel enclosure panels with lift-off mechanical cover and hinged electrical cabinet door
- Upright design on casters
- NPT female connections
- Flow-through cabinet ventilation

CIRCULATING SYSTEM

- Custom cast pump casing
- Custom cast cylinder system
- NEW modulating cooling valve
- Flange mounted dual voltage heater
- Pump seal flush line

INSTRUMENTATION

- NEW microprocessor based controller
- Large and bright temperature display in °F or °C
- Status indicators for Pump, Heat, Cool, Power
- On / off rocker switch
- Digital selection of setpoint
- Process pressure gauges

ELECTRICAL

- Pump motor starter
- Transformer
- Factory installed 10' power cord

LIMITS


- Low water supply pressure
- Motor overload
- Instrument fuse
- Pressure relief valve
- High temperature

WARRANTY

- 2 years parts and labor

OPTIONS

- Closed circuit kit
- Dual zone kit
- Non-ferrous construction
- Mold purge

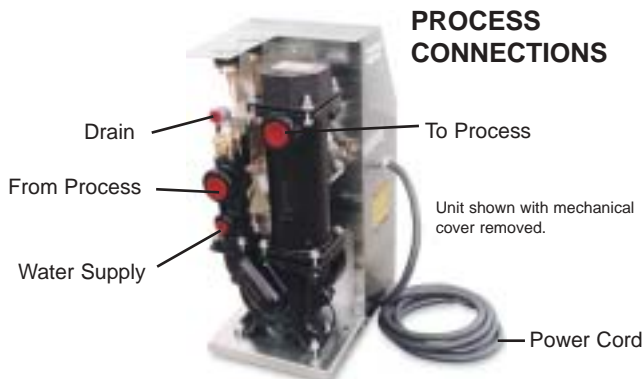

Consult factory for pricing & specifications on larger units.

PRICE & PERFORMANCE... for the LONG TERM

